

Lumirror. F7S

Applications

- Solar Window
- Silicone Coat
- Casting

Surface Property Layer
Core Layer
Surface Property Layer

Lumirror F7S

Product Data Sheet

VERY CLEAR THREE LAYER PET FILM

Summary

F7S is an economy grade solar film whose surface and optical properties are strictly controlled by co-extrusion technology.

www.toraytpa.com rimarketing@toraytpa.com Toray Plastics (America), Inc. 50 Belver Avenue North Kingstown, RI 02852 1.800.453.6866



Technical Data *

| PROPERTIES Thickness | | METHOD | UNITS 0.00001″ | TYPICAL VALUES | | |
|--|-------------------|--------------|-----------------------|----------------|---------|---------|
| | | | | 92 | 142 | 200 |
| Nominal Yield | | - | in²/lb | 21,500 | 13,900 | 9,900 |
| F-5 | MD | ASTM D882 | lb/in ² | 14,900 | 14,900 | 15,200 |
| | TD | | | 14,800 | 13,800 | 14,200 |
| Tensile Strength at Break | MD | – ASTM D882 | lb/in ² - | 31,700 | 26,600 | 26,000 |
| | TD | | | 35,800 | 29,700 | 30,300 |
| Young's Modulus | MD | - ASTM D882 | lb/in ² | 668,500 | 660,000 | 651,400 |
| | TD | | | 745,300 | 733,900 | 732,500 |
| Elongation at Break | MD | ASTM D882 | % - | 160 | 170 | 180 |
| | TD | | | 130 | 130 | 140 |
| Heat Shrinkage (150°C for 30 minutes) | MD | – ASTM D1204 | % - | 1.3 | 1.2 | 1.1 |
| | TD | | | 1.3 | 0.2 | 0.6 |
| Coefficient of Friction | A-side vs. B-side | ASTM D1894 | μ_{s} | 0.4 | 0.4 | 0.4 |
| | | | μ_{D} | 0.3 | 0.3 | 0.3 |
| Haze (1 sheet) | | ASTM 1003 | % | 2.2 | 2.4 | 2.4 |


Key Features

· Co-extruded three layer structure provides low haze and friction

Similar Products

- U65
- U80
- F7R

Winding Direction

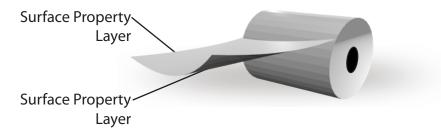

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.