


LUMIRROR[®] GA25

Applications

- Gamma Sterilization
- Medical Packaging
- Heat seal
- Mono web solution

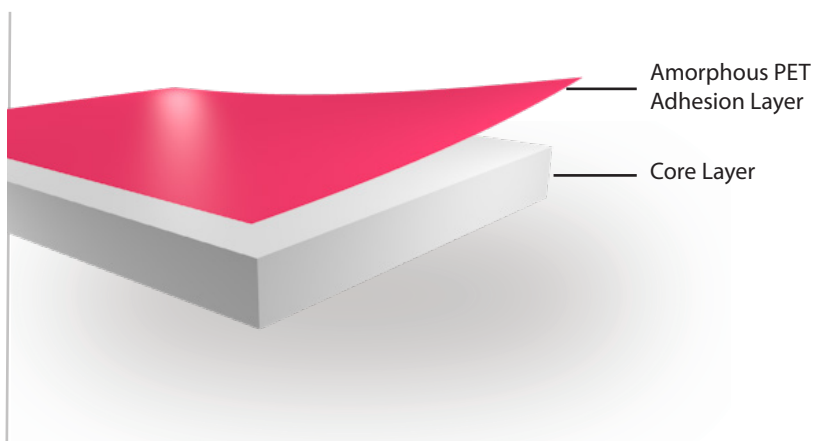

Lumirror GA25

HEAT SEALABLE PET FILM FOR MEDICAL APPLICATIONS

Summary

GA25 is a heat sealable polyester film designed for gamma sterilization and medical packaging.

Technical Data *

PROPERTIES	METHOD	UNITS	TYPICAL VALUES				
Thickness	-	0.00001"	48	60	80	120	
Nominal Yield	-	in ² /lb	41,200	32,900	24,700	16,500	
Tensile Strength at Break	MD	ASTM D882	lb/in ²	35,000	35,700	37,800	32,300
	TD			31,300	32,900	34,100	36,300
Young's Modulus	MD	ASTM D882	lb/in ²	678,500	665,700	662,800	665,700
	TD			688,400	671,300	678,500	746,700
Elongation at Break	MD	ASTM D882	%	120	120	110	150
	TD			120	130	120	120
Heat Shrinkage (150°C for 30 minutes)	MD	ASTM D1204	%	2.3	2.1	2.2	1.9
	TD			0.7	0.7	0.8	0.6
Coefficient of Friction	A-side vs. B-side	ASTM D1894	μ _s	0.7	0.5	0.4	0.4
			μ _b	0.7	0.4	0.3	0.3
Haze (1 sheet)		ASTM 1003	%	2.7	3.3	3.9	6.3
Seal Initiation Temp		Toray Method	°F	250.0	250.0	250.0	250.0
MVTR - 100 °F, 90% RH		ASTM F1249	g/100in ² /day	2.9	2.3	1.8	1.1
O ₂ Barrier - 73 °F, 0% RH		ASTM D3985	cc/100in ² /day	8.0	6.7	5.0	3.3


Key Features

- Excellent tensile and elongation properties after gamma irradiation sterilization
- Sealable to itself or to other materials such as: APET, PETG, PVDC or sheet metal
- The non-sealing side has the standard properties of a plain polyester film
- Excellent dimensional stability at higher temperatures
- Complies with US FDA 21 CFR 177.1630 requirements for food packaging applications
- Drug Master File listed #17749

Similar Products

- GA10
- GA66

Winding Direction

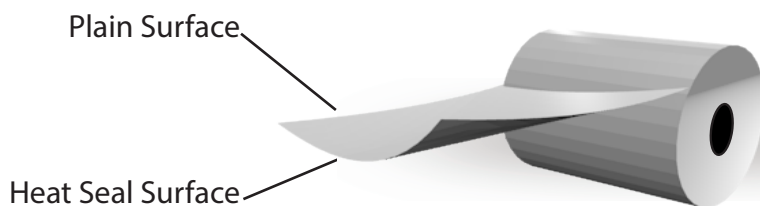

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Lumirror® is a registered trademark of Toray Industries, Inc. for its range of Polyester Films based on Polyethylene Terephthalate (PET).