


LUMIRROR® GA66

Applications

- Gamma Sterilization
- Medical packaging

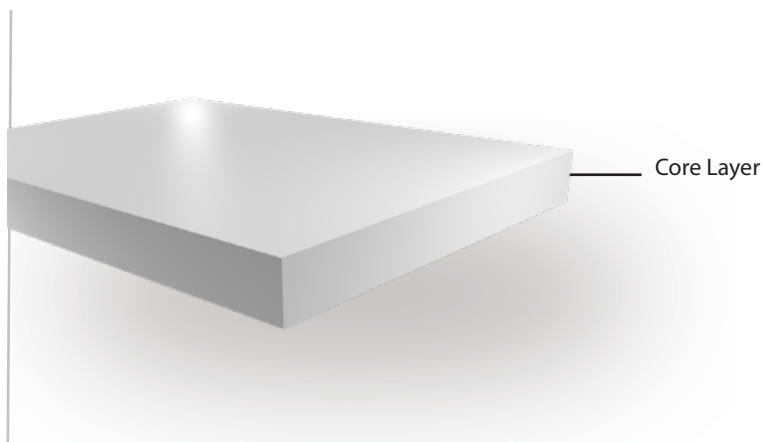

Lumirror GA66

MONO LAYER PET FILM FOR MEDICAL APPLICATIONS

Summary

GA66 is a plain transparent polyester film designed for gamma sterilization and medical packaging.

Technical Data *

PROPERTIES		METHOD	UNITS	TYPICAL VALUES			
Thickness		-	0.0001"	48	75	92	200
Nominal Yield		-	in ² /lb	41,200	26,400	21,500	9,900
F-5	MD	ASTM D882	lb/in ²	15,100	15,400	14,900	15,200
	TD			13,900	13,700	14,100	14,100
Tensile Strength at Break	MD	ASTM D882	lb/in ²	35,400	35,300	30,700	26,000
	TD			34,300	32,700	35,100	30,300
Elongation at Break	MD	ASTM D882	%	130	130	160	180
	TD			120	140	130	130
Heat Shrinkage (150°C for 30 minutes)	MD	ASTM D1204	%	1.6	1.5	1.4	1.3
	TD			0.3	0.2	0.2	0.2
Coefficient of Friction	A-side vs. B-side	ASTM D1894	μ _s	0.4	0.4	0.4	0.4
			μ _D	0.3	0.3	0.3	0.3
MVTR - 100 °F, 90% RH		ASTM F1249	g/100in ² /day	2.9	1.9	1.4	0.7
O ₂ Barrier - 73 °F, 0% RH		ASTM D3985	cc/100in ² /day	8.0	5.0	4.0	1.8


Key Features

- Excellent tensile and elongation properties after gamma irradiation sterilization
- Good machinability due to surface roughness properties
- Excellent dimensional stability at higher temperatures
- Complies with US FDA 21 CFR 177.1630 requirements for food packaging applications
- Drug Master File listed #17749

Similar Products

- GA10
- GA25

Winding Direction

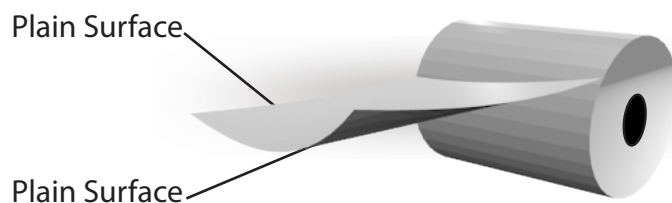

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Lumirror® is a registered trademark of Toray Industries, Inc. for its range of Polyester Films based on Polyethylene Terephthalate (PET).