Developmental Product Data Sheet

TORAY
Innovation by Chemistry

Lumirror LG210

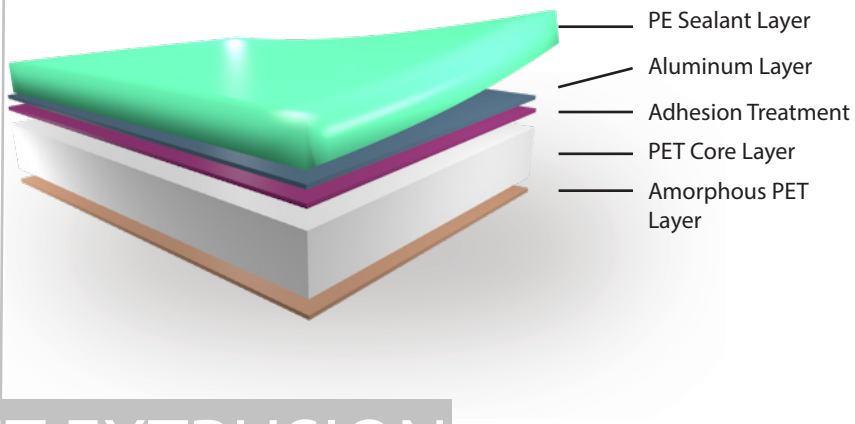

Lumirror LG210

METALIZED PET EXTRUSION COATED WITH A POLYETHYLENE SEALANT

Summary

LG210 is a polyethylene coated metallized PET film for thermal lamination to polyethylene compatible materials.

www.toraytpa.com
rimarketing@toraytpa.com

Toray Plastics (America), Inc.
50 Belver Avenue
North Kingstown, RI 02852
1.800.453.6866

MADE IN U.S.A.

Technical Data *

PROPERTIES		METHOD	UNITS	
Thickness		-	0.00001"	88
Nominal Yield		-	in^2/lb	26,500
Tensile Strength at Break	MD	ASTM D882	lb/in^2	40,700
	TD			36,700
Young's Modulus	MD	ASTM D882	lb/in^2	733,900
	TD			749,600
Elongation at Break	MD	ASTM D882	%	110
	TD			120

Key Features

- Superb chemical and physical properties
- Good reflectivity

Winding Direction

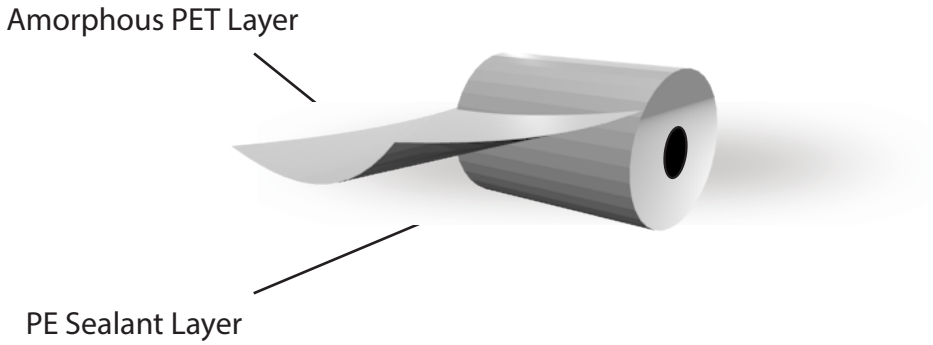

Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical value, measuring conditions, tolerances, deliveries...

* *These values do not constitute specific binding specifications*