


TORAYFAN[®] LG209

Applications

- Thermal lamination
- Board lamination

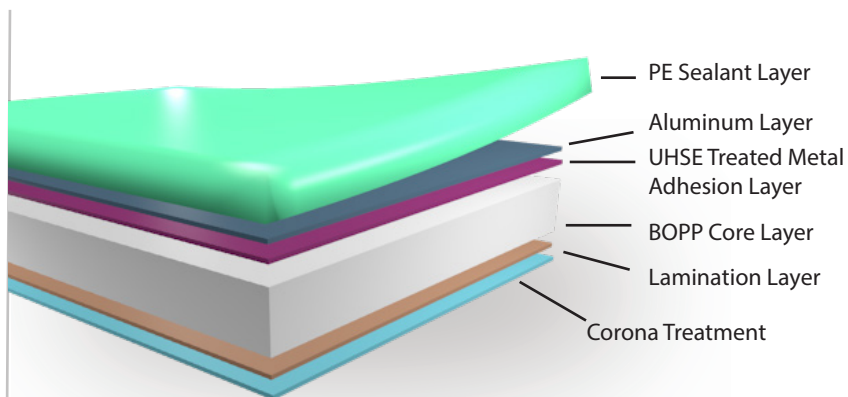

Torayfan LG209

METALIZED BOPP
EXTRUSION COATED WITH
A POLYETHYLENE SEALANT

Summary

LG209 is a polyethylene coated metallized BOPP film for thermal lamination to polyethylene compatible materials.

Technical Data *

PROPERTIES		METHOD	UNITS	TYPICAL VALUES
Thickness		-	0.00001"	100
Nominal Yield		-	in ² /lb	30,400
Tensile Strength at Break	MD	ASTM D882	lb/in ²	14,600
	TD			34,300
Young's Modulus	MD	ASTM D882	lb/in ²	184,000
	TD			233,000
Elongation at Break	MD	ASTM D882	%	220
	TD			50


Key Features

- Good moisture barrier
- Good reflectivity

Winding Direction

Corona Treatment

PE Sealant

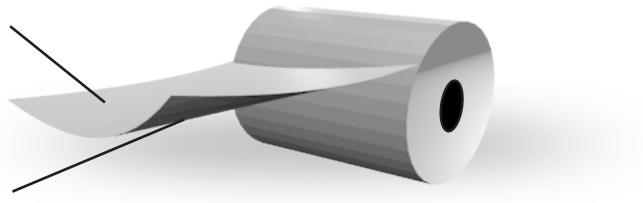

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Torayfan® is a registered trademark of Toray Industries, Inc. for its range of bi-oriented Polypropylene Films (BOPP)