


Lumirror. PS10

Applications

- Printing
- Laminating

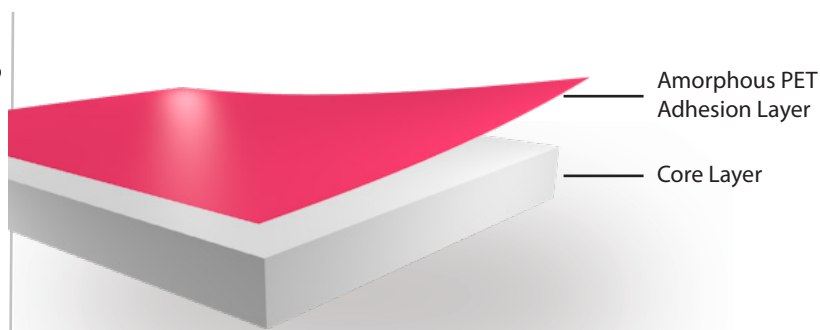

Lumirror PS10

TWO LAYER PET FILM FOR INDUSTRIAL USE, ONE SIDE FOR ADHESION PROMOTION

Summary

PS10 is a plain transparent asymmetrical polyester film with one side modified to improve printing, laminating, and extrusion adhesion for a wide variety of applications.

Technical Data *

PROPERTIES		METHOD	UNITS	TYPICAL VALUES			
Thickness		-	micron	8.1	9.2	23.4	36.1
Nominal Yield		-	m ² /kg	88.2	77.6	30.5	19.8
F-5	MD	ASTM D882	Mpa	109	108	107	102
	TD			99	99	103	94
Tensile Strength at Break	MD	ASTM D882	Mpa	274	278	244	181
	TD			250	249	272	186
Young's Modulus	MD	ASTM D882	Mpa	5129	5090	4580	4678
	TD			5050	5099	5207	5050
Elongation at Break	MD	ASTM D882	%	100	100	150	160
	TD			110	110	120	140
Heat Shrinkage (150°C for 30 minutes)	MD	ASTM D1204	%	2.4	2.4	1.8	1.3
	TD			1.4	1.1	0.5	0.2
Coefficient of Friction	A-side vs. B-side	ASTM D1894	μ_s	0.6	0.5	0.4	0.3
			μ_D	0.5	0.5	0.3	0.2
Haze (1 sheet)		ASTM 1003	%	3.2	3.3	5.6	7.4
MVTR - 38 °C, 90% RH		ASTM F1249	g/m ² /day	68.2	60.5	21.7	15.5
O ₂ Barrier - 23 °C, 0% RH		ASTM D3985	cc/m ² /day	186.0	170.5	62.0	41.9


Key Features

- Excellent mechanical properties
- Good machinability due to surface roughness properties
- Excellent dimensional stability at higher temperatures
- Improved adhesion of inks, adhesives, cohesives and polyethylene on the modified surface

Similar Products

- PA10
- PA30

Winding Direction

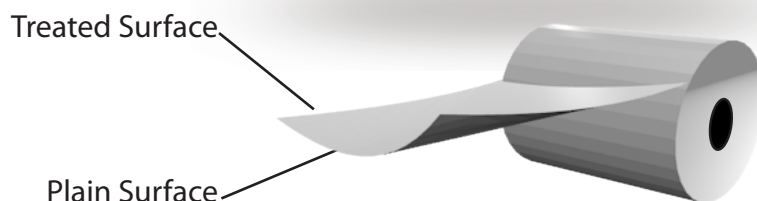

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Lumirror® is a registered trademark of Toray Industries, Inc. for its range of Polyester Films based on Polyethylene Terephthalate (PET).