


Lumirror. U8D

Applications

- Dry film photo-resist

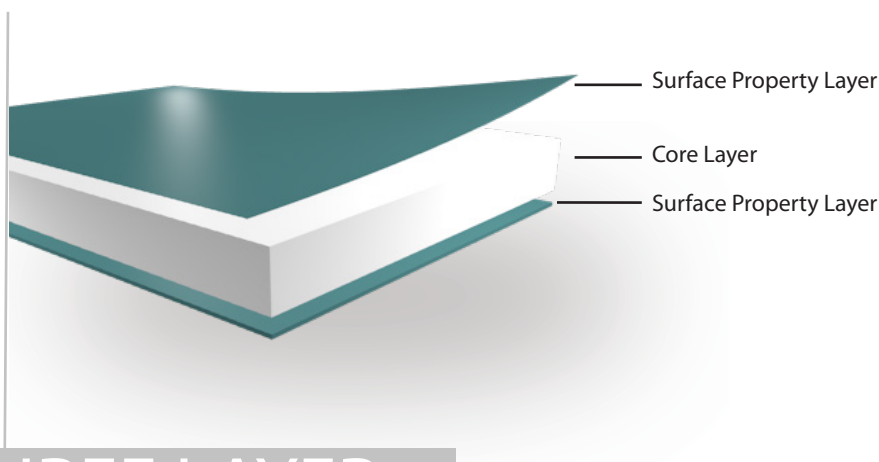

VERY CLEAR THREE LAYER
PET FILM DESIGNED FOR
DFR APPLICATIONS

Summary

U8D is a plain film with improved coefficient of friction (COF) and good handleability characteristics. This film is a balanced shrinkage polyester film designed specifically for dry film photo-resist applications.

Technical Data *

PROPERTIES		METHOD	UNITS	TYPICAL VALUES	
Thickness		-	0.00001"	64	73
Nominal Yield		-	in²/lb	30,900	27,100
F-5	MD	ASTM D882	lb/in²	15,900	16,200
	TD			15,200	16,100
Tensile Strength at Break	MD	ASTM D882	lb/in²	41,000	42,000
	TD			37,000	38,700
Young's Modulus	MD	ASTM D882	lb/in²	742,500	736,800
	TD			758,100	765,200
Elongation at Break	MD	ASTM D882	%	120	110
	TD			120	130
Heat Shrinkage (150°C for 30 minutes)	MD	ASTM D1204	%	2.1	1.9
	TD			1.8	2.1
Coefficient of Friction	A-side vs. B-side	ASTM D1894	μ _s	0.3	0.3
			μ _D	0.4	0.4
Haze (1 sheet)		ASTM 1003	%	2.1	2.0
Internal Haze		Toray Method	%	0.9	0.9
Surface Roughness Ra (outside surface)		DIN 4768	nm	18.0	18.0
Surface Roughness Ra (inside surface)		DIN 4768	nm	18.0	18.0


Key Features

- Co-extruded three layer structure allows for low internal haze, improved imaging and excellent handling

Similar Products

- TA3L
- F6L

Winding Direction

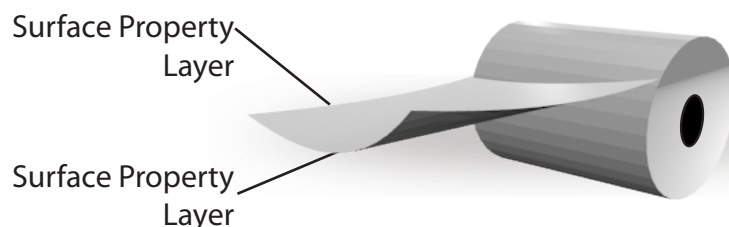

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Lumirror® is a registered trademark of Toray Industries, Inc. for its range of Polyester Films based on Polyethylene Terephthalate (PET).