


TORAYFAN® LGDW-X6

Applications

- Confections
- Snacks
- Bakery
- Pet food
- Ag/Chem
- Medical

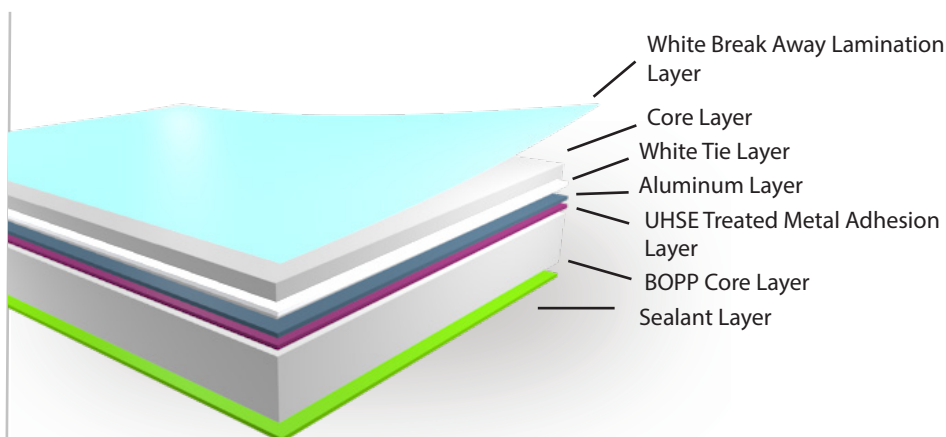

ONE SIDE HEAT SEALABLE, ONE
SIDE EXTRUSION COATED WITH
WHITE BREAK AWAY LAYER

Summary

High barrier, heat sealable BOPP film with white break away lamination layer applied over vacuum deposited aluminum.

Torayfan LGDW-X6

Technical Data *


PROPERTIES		METHOD	UNITS	TYPICAL VALUES
Thickness		-	0.00001"	180
Nominal Yield		-	in ² /lb	19,000
Tensile Strength at Break	MD	ASTM D882	lb/in ²	8,500
	TD			17,300
Young's Modulus	MD	ASTM D882	lb/in ²	126,000
	TD			179,000
Elongation at Break	MD	ASTM D882	%	150
	TD			30
Heat Shrinkage (284°F for 15 minutes)	MD	ASTM D1204	%	8
	TD			3
Coefficient of Friction (Sealant Side)		ASTM D1894	μ _s	0.90
			μ _d	0.75
Heat Seal Strength @ 250°F		1	g/in	430
Seal Initiation Temp (>200g/in)		1	°F	185
MVTR - 100°F, 90% RH		ASTM F1249	g/100in ² /day	0.005
O ₂ Barrier - 73°F, 0% RH		ASTM D3985	cc/100in ² /day	0.05

The product described is covered by one or more of the following patents or patents pending:
US9120294; EP2195161

Key Features

- Superior oxygen barrier
- Superior moisture barrier
- Enhanced stiffness
- Easy open when combined with reverse print web
- Ideal for small runs where extrusion lamination setups are not economical
- Bright white appearance

Winding Direction

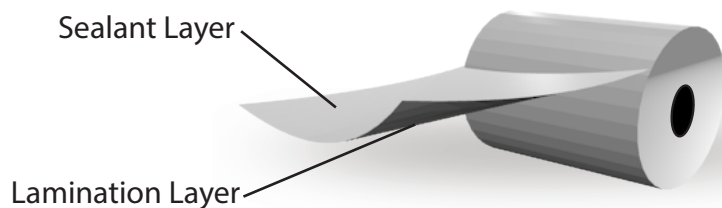

* These values do not constitute specific binding specifications

DISCLAIMER: This information is believed to be correct as of the date of issue. Toray Plastics (America), Inc. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE AND TAKES NO RESPONSIBILITY REGARDING THE SUITABILITY OF THIS INFORMATION FOR THE USER'S INTENDED PURPOSES OR FOR THE CONSEQUENCE OF ITS USE. User is responsible for determining whether the Toray Plastics (America), Inc. product is fit for a particular purpose and suitable for user's method or use of application. Given the variety of factors that can affect the use and application of Toray Plastics (America), Inc. products, which are uniquely within the user's knowledge and control, it is essential that the user make its own tests to determine the safety and suitability of each Toray Plastics (America), Inc. product or product combination for its own purpose.

Torayfan® is a registered trademark of Toray Industries, Inc. for its range of bi-oriented Polypropylene Films (BOPP)